
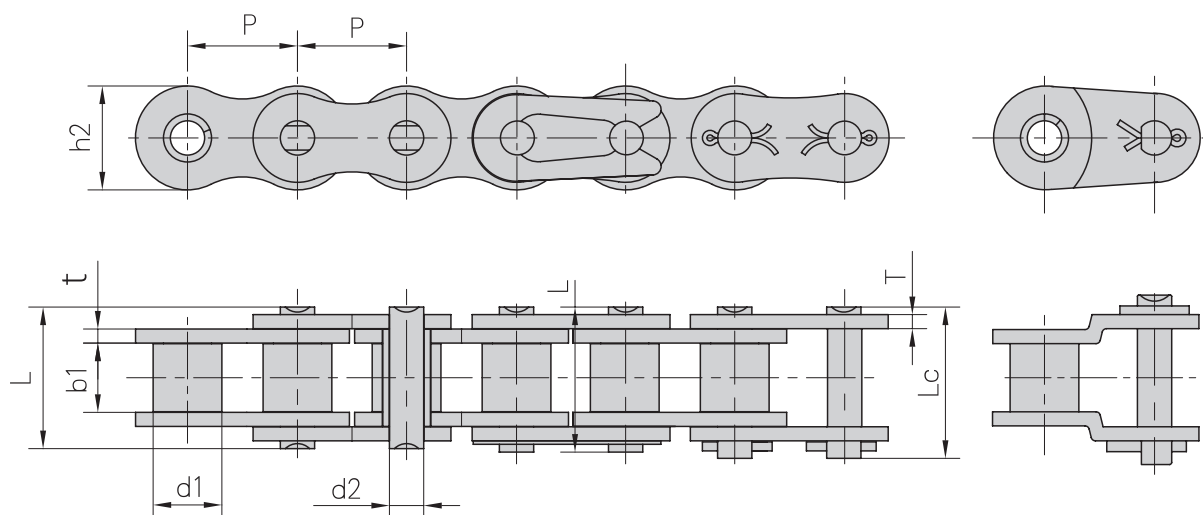



Simplex American Standard Roller Chain

corresponding to ISO 606, DIN8188

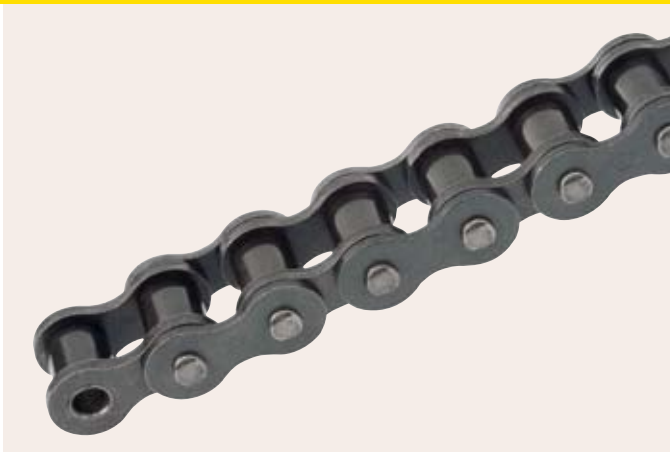

DIN ref.	ANSI ref.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
chain no.	chain no.	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
*03C	*15	4,7625	2,48	2,38	1,62	6,10	6,90	4,30	0,60	1,80/409	2,0	0,08
*04C-1	*25	6,350	3,30	3,18	2,31	7,90	8,40	6,00	0,80	3,50/795	4,6	0,15
*06C-1	*35	9,525	5,08	4,77	3,58	12,40	13,17	9,00	1,30	7,90/1795	10,8	0,33
085-1	41	12,700	7,77	6,25	3,58	13,75	15,00	9,91	1,30	6,67/1516	12,6	0,41
08A-1	40	12,700	7,95	7,85	3,96	16,60	17,80	12,00	1,50	14,10/3205	17,5	0,62
10A-1	50	15,875	10,16	9,40	5,08	20,70	22,20	15,09	2,03	22,20/5045	29,4	1,02
12A-1	60	19,050	11,91	12,57	5,94	25,90	27,70	18,00	2,42	31,80/7227	41,5	1,50
16A-1	80	25,400	15,88	15,75	7,92	32,70	35,00	24,00	3,25	56,70/12886	69,4	2,60
20A-1	100	31,750	19,05	18,90	9,53	40,40	44,70	30,00	4,00	88,50/20114	109,2	3,91
24A-1	120	38,100	22,23	25,22	11,10	50,30	54,30	35,70	4,80	127,00/28864	156,3	5,62
28A-1	140	44,450	25,40	25,22	12,70	54,40	59,00	41,00	5,60	172,40/39182	212,0	7,50
32A-1	160	50,800	28,58	31,55	14,27	64,80	69,60	47,80	6,40	226,80/51545	278,9	10,10
36A-1	180	57,150	35,71	35,48	17,46	72,80	78,60	53,60	7,20	280,20/63682	341,8	13,45
40A-1	200	63,500	39,68	37,85	19,85	80,30	87,20	60,00	8,00	353,80/80409	431,6	16,15
48A-1	240	76,200	47,63	47,35	23,81	95,50	103,00	72,39	9,50	510,30/115977	622,5	23,20

* Bushing chain: d1 in the table indicate the external diameter of the bushing.

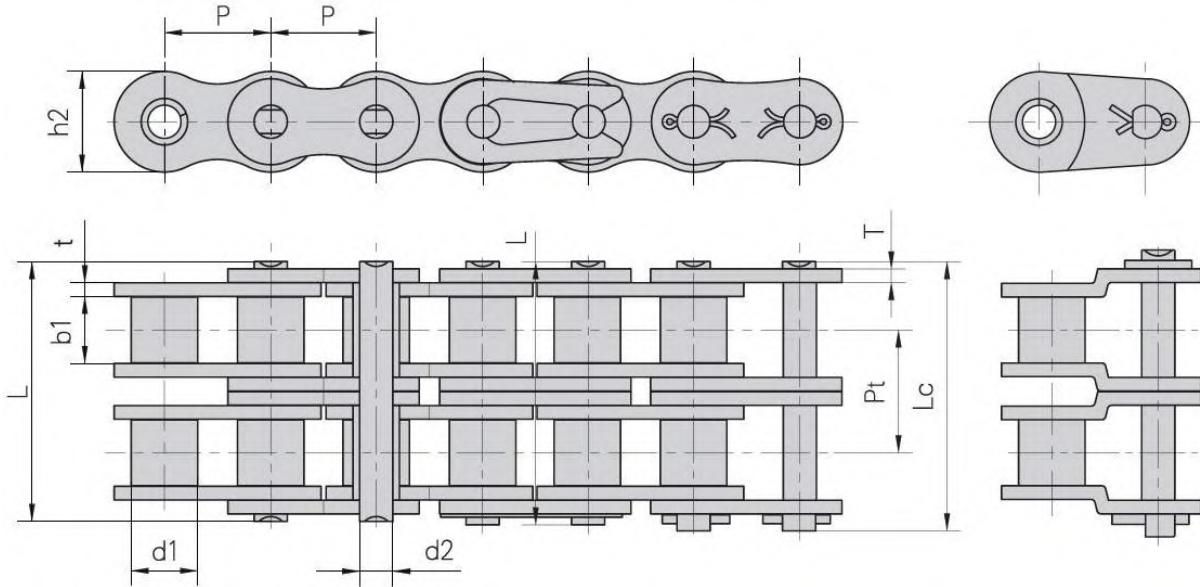


DIN ref.	ANSI ref.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Transverse pitch	Ultimate tensile strength	Average tensile strength	Weight per meter
						L max	Lc max						
chain no.	chain no.	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Pt	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
*04C-2	*25-2	6,35	3,30	3,18	2,31	14,5	15,00	6,00	0,80	6,40	7,00/1591	8,6	0,28
06C-2	*35-2	9,53	5,08	4,77	3,58	22,5	23,30	9,00	1,30	10,13	15,80/3591	19,7	0,63
085-2	41-2	12,70	7,77	6,25	3,58	25,7	26,90	9,91	1,30	11,95	13,34/3032	16,9	0,81
08A-2	40-2	12,70	7,95	7,85	3,96	31,0	32,20	12,00	1,50	14,38	28,20/6409	35,9	1,12
10A-2	50-2	15,875	10,16	9,40	5,08	38,9	40,40	15,09	2,03	18,11	44,40/10091	58,1	2,00
12A-2	60-2	19,05	11,91	12,57	5,94	48,8	50,50	18,00	2,42	22,78	63,60/14455	82,1	2,92
16A-2	80-2	25,40	15,88	15,75	7,92	62,7	64,30	24,00	3,25	29,29	113,40/25773	141,8	5,15
20A-2	100-2	31,75	19,05	18,90	9,53	76,4	80,50	30,00	4,00	35,76	177,00/40227	219,4	7,80
24A-2	120-2	38,10	22,23	25,22	11,10	95,8	99,70	35,70	4,80	45,44	254,00/57727	314,9	11,70
28A-2	140-2	44,45	25,40	25,22	12,70	103,3	107,90	41,00	5,60	48,87	344,80/78364	427,5	15,14
32A-2	160-2	50,80	28,58	31,55	14,27	123,3	128,10	47,80	6,40	58,55	453,60/103091	562,4	20,14
36A-2	180-2	57,15	35,71	35,48	17,46	138,6	144,40	53,60	7,20	65,84	560,50/127386	695,0	29,22
40A-2	200-2	63,50	39,68	37,85	19,85	151,9	158,80	60,00	8,00	71,55	707,60/160818	877,4	32,24
48A-2	240-2	76,20	47,63	47,35	23,81	183,4	190,80	72,39	9,50	87,83	1020,60/213955	1255,3	45,23

* Bushing chain: d1 in the table indicate the external diameter of the bushing.

Triplex American Standard Roller Chain

corresponding to ISO 606, DIN8188

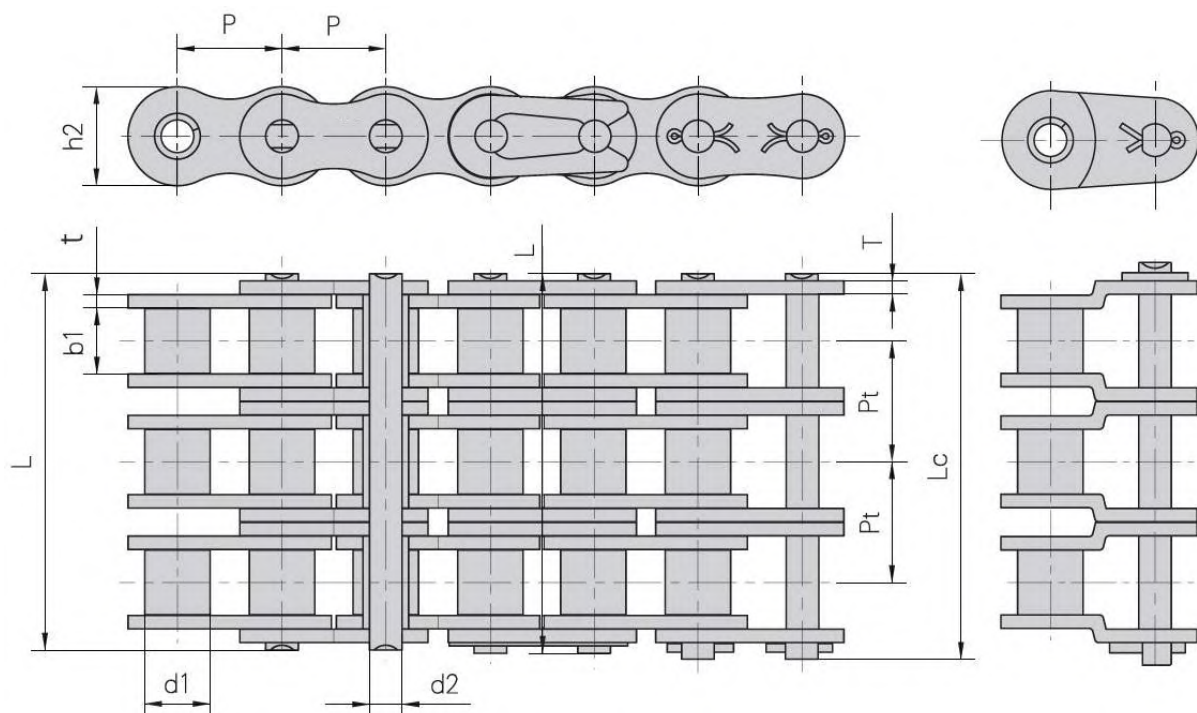

DIN ref. chain no.	ANSI ref. chain no.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Transverse pitch	Ultimate tensile strength	Average tensile strength	Weight per meter
		P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Pt	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
*04C-3	*25-3	6,35	3,30	3,18	2,31	21,0	21,50	6,00	0,80	6,40	10,5/2386	12,6	0,44
*06C-3	*35-3	9,53	5,08	4,77	3,58	32,7	33,50	9,00	1,30	10,13	23,7/5386	28,6	1,05
08A-3	40-3	12,70	7,95	7,85	3,96	45,4	46,60	12,00	1,50	14,38	42,3/9614	50,0	1,90
10A-3	50-3	15,875	10,16	9,40	5,08	57,0	58,50	15,09	2,03	18,11	66,6/15136	77,8	3,09
12A-3	60-3	19,05	11,91	12,57	5,94	71,5	73,30	18,00	2,42	22,78	95,4/21682	111,1	4,54
16A-3	80-3	25,40	15,88	15,75	7,92	91,7	93,60	24,00	3,25	29,29	170,1/38659	198,4	7,89
20A-3	100-3	31,75	19,05	18,90	9,53	112,2	116,30	30,00	4,00	35,76	265,5/60341	309,6	11,77
24A-3	120-3	38,10	22,23	25,22	11,10	141,4	145,20	35,70	4,80	45,44	381,0/86591	437,2	17,53
28A-3	140-3	44,45	25,40	25,22	12,70	152,2	156,80	41,00	5,60	48,87	517,2/117545	593,3	22,20
32A-3	160-3	50,80	28,58	31,55	14,27	181,8	186,60	47,80	6,40	58,55	680,4/154636	780,6	30,02
36A-3	180-3	57,15	35,71	35,48	17,46	204,4	210,20	53,60	7,20	65,84	840,7/191068	983,6	38,22
40A-3	200-3	63,50	39,68	37,85	19,85	223,5	230,40	60,00	8,00	71,55	1061,4/241227	1217,8	49,03
48A-3	240-3	76,20	47,63	47,35	23,81	271,3	278,60	72,39	9,50	87,83	1530,9/347932	1756,5	71,60

*Bushing chain: d1 in the table indicate the external diameter of the bushing.